(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 6 January 2005 (06.01.2005)

(10) International Publication Number WO 2005/000623 A2

(51) International Patent Classification7:

B60K 17/00

(21) International Application Number:

PCT/GB2004/002691

(22) International Filing Date: 23 June 2004 (23.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0314685.9

24 June 2003 (24.06.2003) GB

(71) Applicant (for all designated States except US): IM-PERIAL COLLEGE INNOVATIONS LIMITED [GB/GB]; Sherfield Building, Exhibition Road, London SW7 2AZ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LEDSOME, Eur, Ing. Colin [GB/GB]; 50 St Dunstan's Road, Hanwell, London, W7 2HB (GB).

(74) Agent: BODEN, Kelth, McMurray; Fry Heath & Spence LLP, The Gables, Massetts Road, Horley, Surrey RH6 7DQ (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG. PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KB, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DB, DK, EE, ES, FI, FR, GB, GR, HU, IB, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NB, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DRIVE SYSTEM AND METHOD

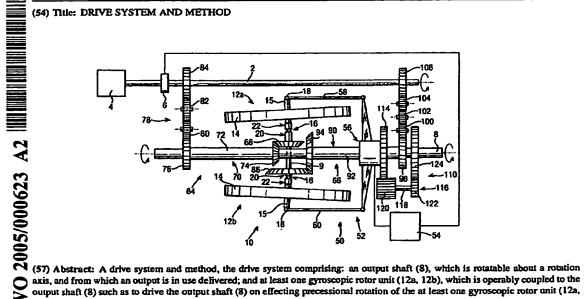

axis, and from which an output is in use delivered; and at least one gyroscopic rotor unit (12a, 12b), which is operably coupled to the output shaft (8) such as to drive the output shaft (8) on effecting precessional rotation of the at least one gyroscopic rotor unit (12a, 12b) about the rotation axis of the output shaft (8).